FORM NO. 51-4AA

CENTRAL INTELLIGENCE AGENCY

50X1-HUM

CLASSIFICATION

SECRET SECURITY INFORMATION

INFORMATION REPORT

REPORT

CD NO.

COUNTRY Czechoslovakia DATE DISTR.

10 December 1952

SUBJECT

Czech 7.65 mm. Automatic Pistol

NO. OF PAGES

1 (2 pages)

2

DATE OF INFO.

NO. OF ENCLS. (LISTED BELOW)

50X1-HUM

PLACE **ACQUIRED**

SUPPLEMENT TO REPORT NO.

THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES, WITHIN THE MEANING OF TITLE 18, SECTIONS 793 AND 794, OF THE U.S. CODE, AS AMENDED. ITS TRANSMISSION OR REVE-LATION OF ITS CONTENTS TO OR RECEIPT BY AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW. THE REPRODUCTION OF THIS FORM IS PROHIBITED

THIS IS UNEVALUATED INFORMATION

50X1-HUM

1.		_						Czech	7.65	automatic
	pistol	issued	to	SNB,StB,	and PS	troops	in	1951. ¹	1 - 2	

- this pistol, manufactured by Ceska Zbrojovka in Strakonice, is 2. also being produced for commercial export. It handles 7.65 mm. (.32 Colt Auto) ammunition. It is a blowback type with the barrel rigidly fixed to the receiver. The recoil spring encircles the barrel 2. The marking NB 50 on the receiver is a model designation and indicates the year of manufacture.
- Special features of this pistol, in addition to the double action trigger, are the exposed hammer with a rounded spur, a cartridge indicator which protrudes slightly from the left side of the slide when a cartridge is in the chamber, and the safety lever located on the upper left side of the receiver. This safety is arranged so that when rotated to the safe position, it releases the hammer to the uncocked position. The hammer is a rebound type; it is blocked from contacting the firing pin unless the trigger is pulled far enough rearward to actuate the sear.
- Instructions for field stripping are as follows. After withdrawing the magazine, depress disassembly catch on the right side of the receiver and pull slide rearward and upward until it disengages. Allow the slide to move forward under spring pressure, and remove recoil spring from the barrel.

CLASSIFICATION

ਪੰਜ਼ ਹਾਮਜ਼ਾ

							 	 	, , , , , , , , , , , , , , , , , , , 	
STATE #	x	NAVY	#	x	NSRB	DISTRIBUTION		l		
ARMY' #	x	AIR	#	x	FBI	OSI/Weapons Ev x		<u> </u>		

SECRET/SECURITY INFORMATION

5. Characteristics of the weapon are:

(a) Magazine capacity: eight rounds

(b) Magazine catch: on left side of receiver, behind trigger

(c) Sights: U notch rear; patridge blade front

(d) Rifling: six groeves; uniform right hand pitch

(e) Stocks: brown plastic

(f) Barrel length: 3.75 inches

(g) Over-all length: 6.60 inches

(h) Height: 4.35 inches

(1) Maximum thickness: 1.10 inches

(j) Weight: 23.8 ounces

(k) 50X1-HUM

7.55 also in the circle; Ceska Zbrojovka Nar Podnik Strakonice. On receiver, NB 50.

-end-

50X1-HUM

Comment.

Comment.

Comment.

Comment.

This pistol is of relatively recent introduction because of its double action trigger mechanism which closely resembles the PP and PPK Walther. The pistol also resembles a late pattern Bergmann 7.65 mm. automatic pistol produced in Suhl, Germany.

Enclosure : Drawing of 7.65 mm. Automatic Pistol

SECRET

SECRET

SECRET SECURITY INFORMATION Part I 7.65 mm Autometic Pistol 50X1-HUM Right View

SECRET SECURITY INFORMATION

50X1-HUM

SECRET SECURITY INFORMATION


Enclosur e


Czech 7.65 mm Automatic Pistol

Part II

Field Stripped



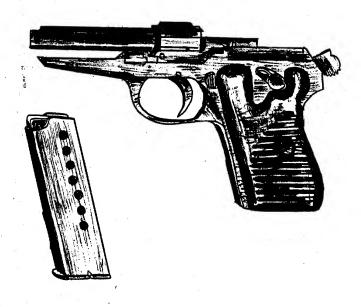



-2-

SECRET SECURITY INFORMATION